



## Temperature / mA converter

### 9113B

- Input for RTD, TC and mA
- Active / passive mA output
- 1 or 2 channels
- Can be supplied separately or installed on power rail, PR type 9400
- SIL 2-certified via Full Assessment



#### Advanced features

- Configuration and monitoring by way of detachable display front (PR 4501); process calibration and signal simulation.
- Copying of the configuration from one device to others of the same type via the display front.
- TC inputs can use either the internal CJC or a terminal with a built-in Pt100 sensor (PR 5910Ex, channel 1 / PR 5913Ex, channel 2) for higher accuracy.
- The device automatically detects whether it must supply an active or a passive current signal.
- Advanced monitoring of internal communication and stored data.
- SIL 2 functionality is optional and must be activated in a menu point.


#### Application

- The device can be mounted in the safe area and in zone 2 / cl. 1 div. 2 and receive signals from zone 0, 1, 2 and zone 20, 21, 22 including M1 / Class I/II/III, Div. 1, Gr. A-G.
- Conversion and scaling of temperature (Pt, Ni and TC) and active current signals.
- The 9113 has been designed, developed and certified for use in SIL 2 applications according to the requirements of IEC 61508.

#### Technical characteristics

- 1 green and 2 red front LEDs indicate operation status and malfunction.
- 2.6 kVAC galvanic isolation between input, output and supply.

#### Connection

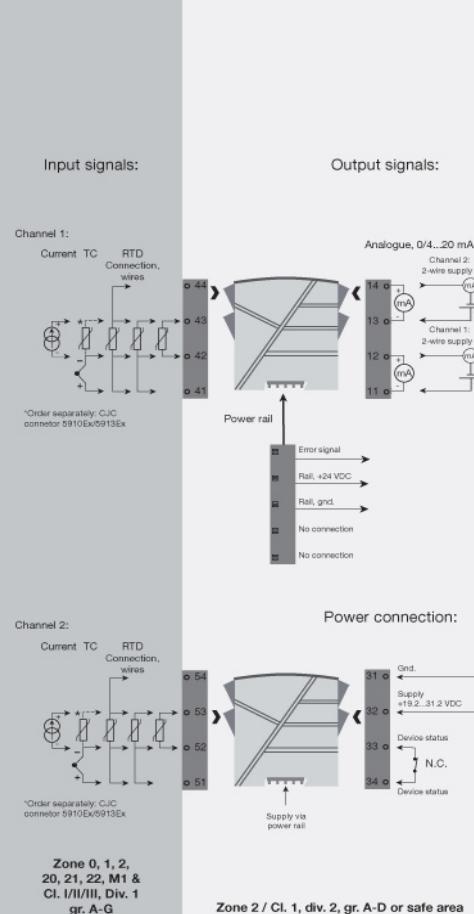

## Environmental Conditions

Specifications range.....	-20°C to +60°C
Storage temperature.....	-20°C to +85°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20
Installation in.....	Pollution degree 2 & measurement / overvoltage category II

## Mechanical specifications

Dimensions (HxWxD).....	109 x 23.5 x 104 mm
Dimensions (HxWxD) w/ display 4501.....	109 x 23.5 x 116 mm
Weight approx.....	250 g
Weight incl. 4501 / 4511 (approx.).....	265 g / 350 g
DIN rail type.....	DIN EN 60715 - 35 mm
Wire size.....	0.13...2.08 mm <sup>2</sup> AWG 26...14 stranded wire
Screw terminal torque.....	0.5 Nm

## Common specifications

Supply voltage.....	19.2...31.2 VDC
Fuse.....	400 mA SB / 250 VAC
Max. power consumption.....	≤ 3.5 W (2 channels)
Isolation voltage, test /working:	
Input to any.....	2.6 kVAC / 300 VAC reinforced isolation
Analog output to supply.....	2.6 kVAC / 300 VAC reinforced isolation
Status relay to supply.....	1.5 kVAC / 150 VAC reinforced isolation
Communications interface.....	Programming front 4501
Communications interface.....	Modbus communication enabler 4511
Signal / noise ratio.....	Min. 60 dB (0...100 kHz)
Average response time incl. delay: Temperature input.....	≤ 1 s
mA input.....	≤ 0.4 s
EMC immunity influence.....	< ±0.5% of span
Extended EMC immunity: NAMUR NE 21, A criterion, burst.....	< ±1% of span

## Input specifications

RTD input.....	Pt10, Pt20, Pt50, Pt100, Pt200, Pt250, Pt300, Pt400, Pt500, Pt1000, Ni50, Ni100, Ni120, Ni1000
Cable resistance per wire (max.), RTD.....	50 Ω
Sensor current, RTD.....	Nom. 0.2 mA
Effect of sensor cable resistance (3-/4-wire), RTD.....	< 0.002 Ω / Ω
Sensor error detection, RTD.....	Programmable ON / OFF
TC input: Thermocouple type.....	B, E, J, K, L, N, R, S, T, U, W3, W5, LR
Cold junction compensation (CJC) via ext. sensor in connector 5910.....	20...28°C ≤ ±1°C, -20...20°C / 28...70°C ≤ 2°C
CJC via internally mounted sensor.....	±(2.0°C + 0.4°C * Δt) internal temperature-ambient temperature
Δt =.....	
Sensor error detection, TC.....	Programmable ON or OFF (only wire breakage)
Sensor error current - when detecting / else.....	Nom. 2 μA / 0 μA
Current input: Measurement range.....	0...20 mA
Current input: Programmable measurement ranges.....	0...20 and 4...20 mA
Input resistance, current input.....	Nom. 20 Ω + PTC 50 Ω
Sensor error detection, current.....	Programmable ON / OFF

## Output specifications

Current output: Signal range.....	0...20 mA
Programmable signal ranges.....	0...20 / 4...20 / 20...0 and 20...4 mA
Load (max.).....	20 mA/600 Ω/12 VDC
Load stability, current output.....	≤ 0.01% of span/100 Ω
Sensor error detection, current output.....	0 / 3.5 / 23 mA / none
NAMUR NE 43 Upscale/Downscale.....	23 mA / 3.5 mA
Output limitation, on 4...20 and 20...4 mA signals.....	3.8...20.5 mA
Output limitation, on 0...20 and 20...0 mA signals.....	0...20.5 mA
Current limit.....	≤ 28 mA
2-wire 4...20 mA output: External	
2-wire supply range.....	3.5...26 VDC
Signal range.....	4...20 mA
Max. load resistance [Ω].....	(Vsupply - 3.5) / 0.023 A
Load stability, 4...20 mA output.....	≤ 0.01% of span / 100 Ω
Effect of external 2-wire supply voltage variation.....	< 0.005% of span / V
Max. voltage, status relay.....	110 VDC / 125 VAC
Max. current, status relay.....	0.3 ADC / 0.5 AAC
Max. AC power, status relay.....	62.5 VA / 32 W
*of span.....	= of the currently selected measurement range

## Approvals

EMC.....	EN 61326-1
LVD.....	EN 61010-1
ATEX.....	KEMA 07ATEX0148 X
IECEx.....	KEM 09.0052X
cFMus.....	3038279-C
UL.....	UL 61010-1
GOST R.....	Yes
GOST Ex.....	Yes
DNV Marine.....	Stand. f. Certific. No. 2.4
SIL 2.....	PREI 070902 P0002 C03.01
SIL 2.....	Certified & Fully Assessed acc. to IEC 61508