

## Optoelectronic level switch

**Model OLS-S, for the process industry (with Ex i approval: KSR-OPTO.21\*06XX)**

**Model OSA-S, switching amplifier (with Ex i approval: KSR-OPTO.2502.XX)**

WIKA data sheet LM 31.01




### Applications

- Chemical, petrochemical, natural gas, offshore industries
- Shipbuilding, machine building, refrigerator units
- Power generating equipment, power plants
- Process and drinking water treatment
- Wastewater and environmental engineering

### Special features

- Temperature ranges from -269 ... +400 °C
- Versions for pressure ranges from vacuum to 500 bar
- Special versions: High pressure, interface measurement
- Explosion-protected versions
- Signal processing is made using a separate model OSA-S switching amplifier

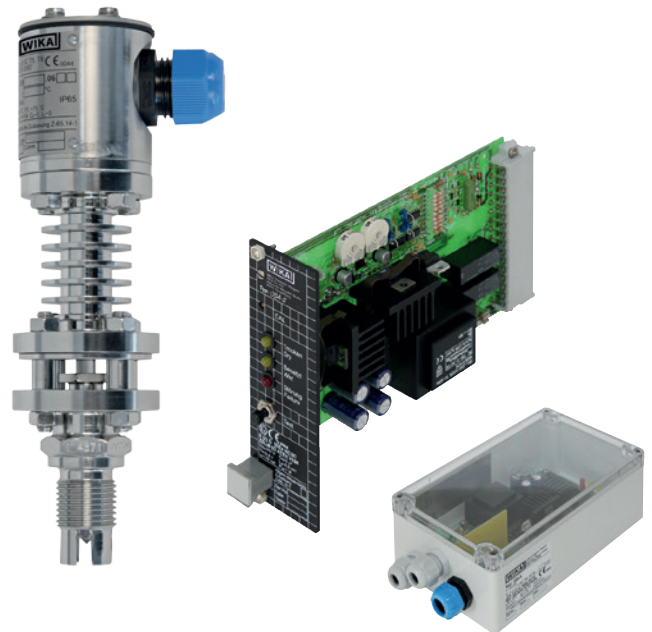

**Fig. left: Model OLS-H, high-pressure version**

**Fig. centre: Model OSA-S, 19" plug-in card**

**Fig. right: Model OSA-S, polycarbonate add-on case**

## Description

The model OLS optoelectronic level switch is used for the detection of limit levels in liquids. This is widely independent of physical characteristics such as refractive index, colour, density, dielectric constant and conductivity. Measurement is also done in small volumes.

The switches consist of an infrared LED and a phototransistor. The light of the LED is directed into a prism. So long as the sensor tip of the prism is in the gas phase, the light is reflected within the prism to the receiver. When the liquid in the vessel rises and wets approximately 2/3 of the glass tip, the infrared lightbeam into the liquid is interrupted and only a small portion reaches the receiver. This difference is evaluated by the electronics and triggers a switching operation.




The model OLS optoelectronic level switch is also available as an explosion-protected version (zone 0 and zone 1). Together with the model OSA-S switching amplifier the sensor can be used as overflow control. The instruments are very robust and designed for rough operating conditions.

The cable to the switching amplifier does not need any shield, enabling easy and economic cabling. The model OSA-S switching amplifier is operated with an intrinsically safe signal circuit. For the 19" plug-in card version, all operating elements, except for the switch for changing the alarm direction and the potentiometers for the time delay, can be accessed from the front. If incorporated in an add-on case, a transparent cover allows seeing the switching statuses.


## Model overview

Model	Ex i approval		Description	Max. pressure in bar		Medium temperature in °C	Ambient temperature in °C
	without	with		Standard version	High pressure version		
OLS	x	-	Optoelectronic level switch	250 bar	500 bar	-269 ... +400 °C	-65 ... +95 °C
KSR-OPTO.21*06XX	-	x					
OSA-S	x	-	Switching amplifier for ptoelectronic level switches	-	-	-	-40 ... +60 °C
KSR-OPTO.2502.XX	-	x					

## Approvals


Logo	Description	Land
	<b>EC declaration of conformity</b> <ul style="list-style-type: none"> <li>EMC directive</li> <li>Low voltage directive</li> <li>ATEX directive (option)</li> </ul> Model: KSR-OPTO.21*06XX: Zone 0/1, gas II 1/2 G Ex ib IIC T5, T6 ZELM 06 ATEX 0299 Model: KSR-OPTO.2502.XX: Zone 0/1, gas II (2) G [Ex ib] IIC, ZELM 06 ATEX 0300	European community
	<b>EAC</b> <ul style="list-style-type: none"> <li>Electromagnetic compatibility</li> <li>Low Voltage Directive</li> <li>Hazardous areas</li> </ul>	Eurasian economic community
	<b>SIL 2</b> Functional safety (SIL rating per IEC 61508) SIL 1 in a combination of both instruments	International

## Optoelectronic level switch, standard version, model OLS-S, (with Ex i approval: KSR-OPTO.21\*06XX)

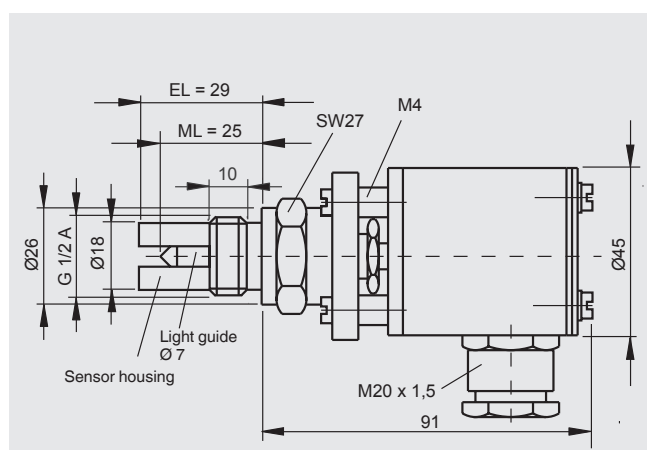

Specifications	
<b>Switch point ML</b>	Standard: 25 mm, with extension 50 ... 960 mm
<b>Insertion length EL</b>	Standard: 29 mm (ML + 4 mm)
<b>Medium temperature</b>	-65 ... +250 °C
<b>Ambient temperature</b>	-65 ... +95 °C
<b>Pressure range</b>	0 ... 250 bar
<b>Measurement type</b>	Level measurement with glass tip shape V, option: Interface layer
<b>Glass protection</b>	Guard finger
<b>Process connection</b>	G 1/2 A, 1/2 NPT, option: Flange
<b>Material</b>	Stainless steel 1.4571 Option: Hastelloy, other materials on request
<b>Light guide</b>	Clad core glass Option: quartz (ML: max. 200 mm) sapphire (ML: max. 60 mm)
<b>Mounting position</b>	As required
<b>Measuring accuracy</b>	±0.5 mm
<b>Repeat accuracy</b>	±0.1 mm
<b>Light source</b>	IR light 930 nm
<b>Ambient light</b>	Max. 100 Lux
<b>Cable gland</b>	M20 x 1.5; Ex: blue
<b>Terminal connection</b>	3 x 2.5 mm <sup>2</sup>
<b>Ingress protection</b>	IP65 per EN/IEC 60529

## Optoelectronic level switch, high-pressure version, model OLS-H, (with Ex i approval: KSR-OPTO.21\*06XX)

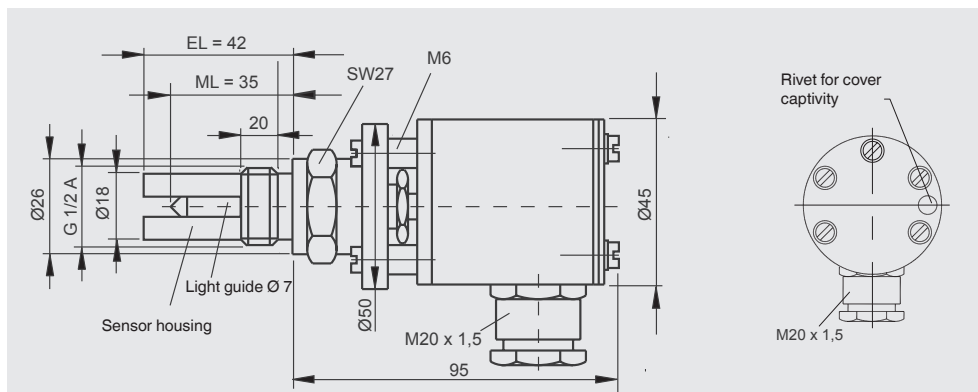


### Specifications

<b>Switch point ML</b>	Standard: 35 mm, with extension 60 ... 960 mm
<b>Insertion length EL</b>	Standard: 42 mm (ML + 7 mm)
<b>Medium temperature</b>	-65 ... +250 °C
<b>Ambient temperature</b>	-65 ... +95 °C
<b>Pressure range</b>	0 ... 500 bar
<b>Measurement type</b>	Level measurement with glass tip shape V, option: Interface layer
<b>Glass protection</b>	Guard finger
<b>Process connection</b>	G 1/2 A, 1/2 NPT, option: Flange
<b>Material</b>	Stainless steel 1.4571 Option: Hastelloy, other materials on request
<b>Light guide</b>	Clad core glass Option: quartz (ML: max. 200 mm) sapphire (ML: max. 60 mm)
<b>Mounting position</b>	As required
<b>Measuring accuracy</b>	±0.5 mm
<b>Repeat accuracy</b>	±0.1 mm
<b>Light source</b>	IR light 930 nm
<b>Ambient light</b>	Max. 100 Lux
<b>Cable gland</b>	M20 x 1.5; Ex: blue
<b>Terminal connection</b>	3 x 2.5 mm <sup>2</sup>
<b>Ingress protection</b>	IP65 per EN/IEC 60529


## Options for models OLS-S and OLS-H

### Cooling fin for high- and low-temperature version

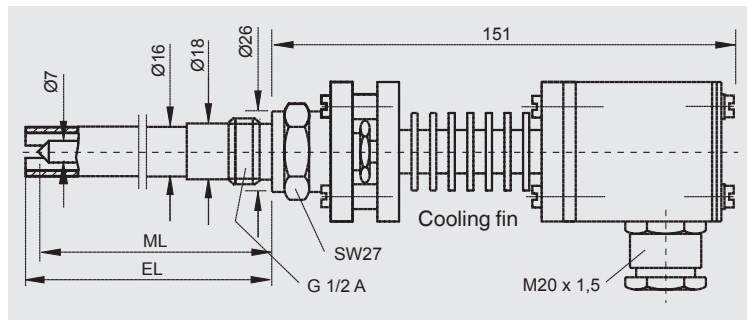

Specifications	
Temperature range	-269 ... +400 °C
Ambient temperature	-65 ... +95 °C


### Flanged version

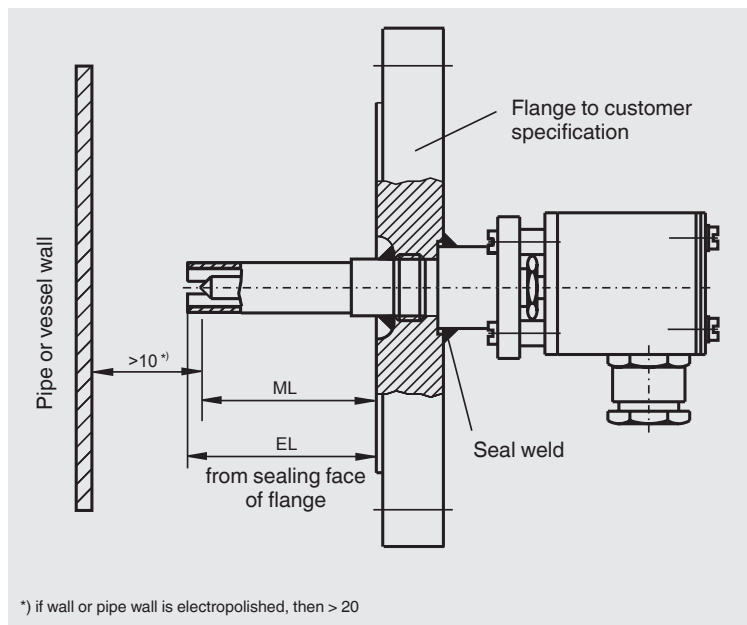

Process connection	Nominal width	Pressure rating	Sealing face
Flange EN 1092-1	DN 20 ... DN 50	PN 16 ... PN 400	B1, B2, C, D, E
Flange DIN	DN 20 ... DN 50	PN 16 ... PN 400	C, F, N
Flange ANSI	1/2" ... 2"	Class 150 ... Class 2500	RF, RTJ, FF


### Version with sieve

Protection from gas bubble formation at the glass tip

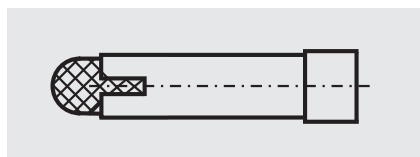


### Version for interface layer

Open glass tip, shape U




### Electrical connection diagram

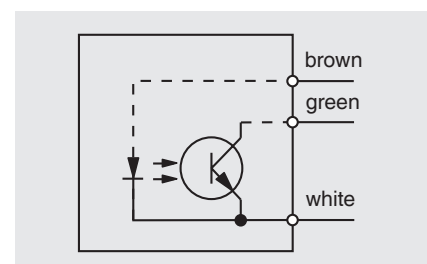


# Switching amplifier model OSA-S, (with Ex i approval: KSR-OPTO.2502.XX)

For optoelectronic level switch models OLS-S and OLS-H

## Version 19" plug-in card

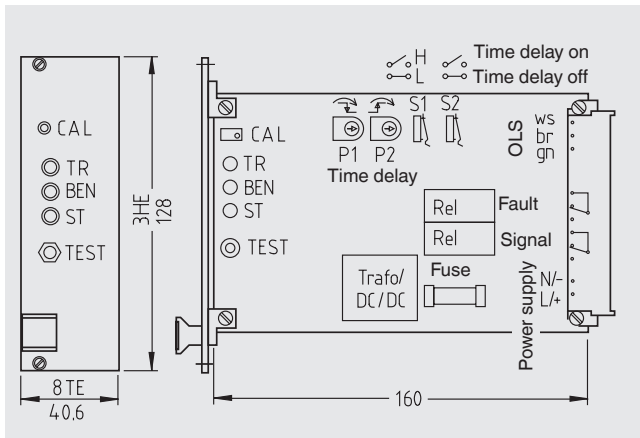

## Version in polycarbonate add-on case

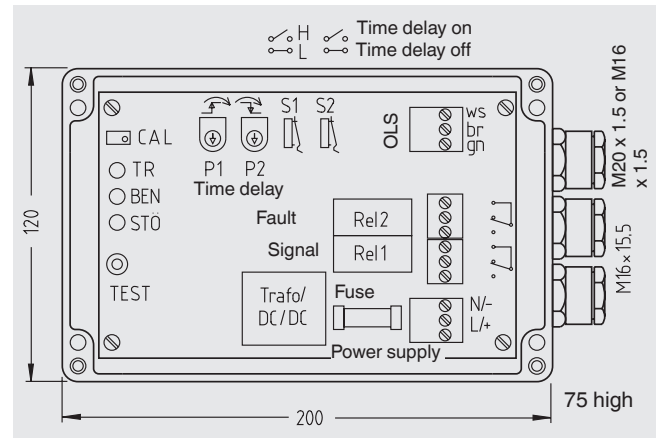

Specifications	
<b>Ambient temperature</b>	-25 ... +60 °C
<b>Power supply</b>	AC 230 V, AC 15/120 V, AC 24 V, DC 24 V
<b>Power consumption</b>	2.8 VA, 3 W
<b>Outputs</b>	Signal relay, change-over contact, 250 V, 3 A, 100 VA Failure relay, change-over contact, 250 V, 3 A, 100 VA
<b>Cable gland</b>	-
<b>Max. connection cross-section</b>	2.5 mm <sup>2</sup>
<b>Max. cable length</b>	175 ... 600 m (with 0.5 ... 1.5 mm <sup>2</sup> )
<b>Ingress protection</b>	IP20 per EN/IEC 60529

Specifications	
<b>Ambient temperature</b>	-40 ... +40 °C
<b>Power supply</b>	AC 230 V, AC 15/120 V, AC 24 V, DC 24 V
<b>Power consumption</b>	2.8 VA, 3 W
<b>Outputs</b>	Signal relay, change-over contact, 250 V, 3 A, 100 VA Failure relay, change-over contact, 250 V, 3 A, 100 VA
<b>Cable gland</b>	M16 x 1.5 / M20 x 1.5 Ex: blue
<b>Max. connection cross-section</b>	2.5 mm <sup>2</sup>
<b>Max. cable length</b>	175 ... 600 m (with 0.5 ... 1.5 mm <sup>2</sup> )
<b>Ingress protection</b>	IP65 per EN/IEC 60529

### Application information

- 32-pin connector per DIN 41612, form F
- Operating elements accessible from the front
- Exceptions:
  - Switch for changing the alarm direction
  - Potentiometers for time delay

### Application information


- Transparent cover, good readability of the LED displays for dry/wetted/fault
- Ingress protection IP65 per EN/IEC 60529, field use possible

### General data

- Functions
- Alarm direction selectable
  - On-delay and drop-out delay for signal relay settable up to approx. 8 s
- Monitoring
- Wire break signal circuit
  - Short-circuit signal circuit
  - Internal power supply, fail-safe

Design data	
<b>Max. external inductance <math>L_{max}</math></b>	0.5 mH
<b>Max. external capacitance <math>C_{max}</math></b>	3 $\mu$ F
<b><math>U_0</math></b>	$\leq 9.6$ V
<b><math>I_0</math></b>	$\leq 149$ mA
<b><math>P_0</math></b>	$\leq 1.0$ W

## Electrical connection diagram

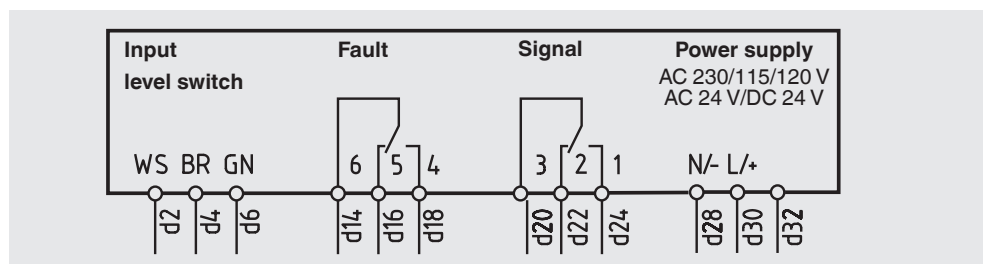

## Switching amplifier, model OSA-S

Version	Power supply	Order number
Polycarbonate add-on case	DC 24 V potential-free	500281
	DC 24 V non-potential-free	500283
	AC 24 V	500279
	AC 115/120 V	on request
	AC 230 V	500275
19" plug-in card	DC 24 V potential-free	500282
	DC 24 V non-potential-free	500284
	AC 24 V	500280
	AC 115/120 V	500278
	AC 230 V	500277

## Switching amplifier with EX i approval, model KSR-OPTO.2502.XX

Version	Power supply	Order number
Polycarbonate add-on case	DC 24 V mit Potentialtrennung	500291
	AC 24 V	500289
	AC 115/120 V	500287
	AC 230 V	500285
19" plug-in card	DC 24 V mit Potentialtrennung	500292
	AC 24 V	500290
	AC 115/120 V	500288
	AC 230 V	500286

## Ordering information

To order the described product the order number is sufficient.

Alternatively:

Level switches: Model / Process connection / Measurement type / Switch point ML / Process specifications (operating temperature and pressure) / Material / Glass / Sieve

Switching amplifiers: Typ / Gehäuse / Hilfsenergie

© 01/2010 WIKA Alexander Wiegand SE & Co. KG, alle Rechte vorbehalten.  
Die in diesem Dokument beschriebenen Geräte entsprechen in ihren technischen Daten dem derzeitigen Stand der Technik.  
Änderungen und den Austausch von Werkstoffen behalten wir uns vor.

